

Genuine

**Fatstrippa**

Patented Grease Removal System

# Data Sheet

Model Number

## FS 125




### Specifications

Maximum Effluent Separation Rate	1.25 Litres Per Second
Discharge Water Oil Concentration	<100 PPM
Recovered Oil Water Concentration	< 5%
Maximum Design Effluent Concentration	90% Oil / 10% Water
Optimum Operating Temperature	30-40 Deg C.
Heater Element	Single Phase 1.5 Kw 240V Thermostat Controlled (Default Temp Setting 35 Deg C). Hert 50/60
Inlet	40 mm Female Fitting
Outlet	50 mm Female Fitting
Silt Outlet	1 Inch BSP Female Fitting
Oil Cassette Capacity	3.75 Litres
Construction	3 mm 304 Grade Stainless Steel
Warranty Construction	10 Years
Heater Warranty	1 Year

### Overview

- FS 125 is designed for use in medium size kitchens with 1-2 double drainer sinks and / or attached to specific equipment with combined flow rate up to 1.25 Litres / Second.
- Variations available. See Website for information [www.fatstrippa.eu](http://www.fatstrippa.eu)
  - Flour Specific Strainer Basket
  - Extended Strainer Basket
  - Floor mounted or raised.
  - Integrated Timer Heater Element
  - Left or Right Hand
  - Rear Inlet
- For use with:
  - Combination ovens
  - Steamers
  - Rotisserie ovens
  - Fryers
  - Wok stations
  - Dish and pot washer machines
  - Sinks
  - Floor gullies
  - Beverage equipment
  - Ventilation system (including cooker hoods, soot abatement and spark arrestor hoods) incorporating a drain for water wash down.

### External Dimensions Quick Reference

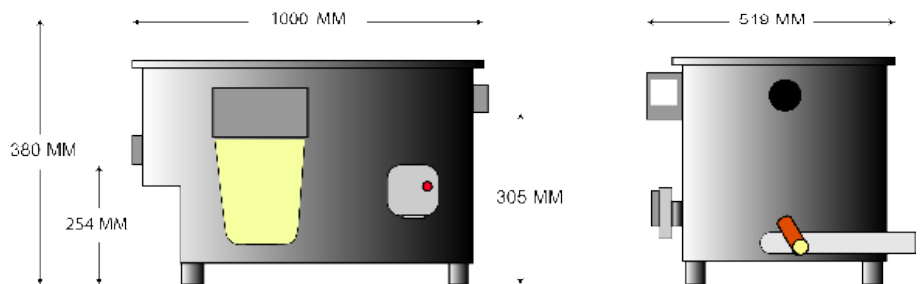

### Compliance Note

All Fatstrippa Products Facilitate Compliance with:

- UK Water Industry Act 1991
- Approved Document H building regulations – Drainage and Waste Disposal, 2015 Edition. BS.EN.1825:2004 and BS.EN.1825:2002.
- Designed in accordance with Standard PDI-G101.
- Environmental Protection Act 1990 – Food Safety & Hygiene Regulations 2013 & European Regulation (EC) No. 852/2004\*
- Construction Products Regulations (CPR) requirement under the Scope of harmonised European standards (hEN's) for CE marking.
- BS EN12056-1:2000 with regards to the health and safety of users and occupiers and the penetration of toxic or noxious odours in buildings